



阳光系列产品

YANGGUANG METERING PUMP



[HTTP://WWW.YG-PUMP.COM](http://www.yg-pump.com) 用户使用手册




DP 微型隔膜泵系列



阳光泵业

用途 Purpose

- 1、适用于家用自来水增压、汽车冲洗、轮船上海水淡化。
- 2、适用于反渗透纯水机、水处理设备、过滤器、喷雾装置、化工计量加液、及卫生、环保、印刷等行业中使用。
- 1、To increase the pressure of the house water supplier, facilitate the auto hydro-cleaning, and seawater desalt on the boat.
- 2、Be the same with the water purify by filter, water refine equipment, filter, sprayer serve and supply measure in various industry say chemical, hygiene, environmental protecting, and printing etc.

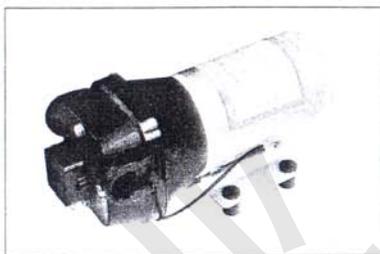

特点 Product feature


- ☐ 噪音低、耐腐蚀、压力高，自吸高度5m。
- ☐ 介质温度可达60℃。
- ☐ 允许干运转。
- ☐ 内装压力开关以保护泵运转时不受损坏。
- ☐ 内装溢流阀控制泵的正常运行。
- ☐ 拆装方便。
- ☐ 采用安全低电压，保证人身安全。
- ☐ Low sound , corruption proof, high pressure driven power, auto-suck 5m maximal.
- ☐ Temperature of medium at 60℃ maximal.
- ☐ Dehydration performance permitted.
- ☐ Self-serve switch which control by pressure test make sure the water pump free from damage on its performing.
- ☐ Inne spilling valve insure it performance the regular.
- ☐ Easily disassembl and assembl.
- ☐ Low voltage supply avoid the human threaten.

技术参数 Technical parameter

型号 Model	电压 Voltage (VDC)	最大电流 Maximal (A)	最大流量 Maxcapacity (ml/min) (LPM)	转速 Revolution (rpm)	最高压力 Max pressure (Mpa)	吸程 Suction Course	调压开关 Psi(MPa)	功率 Power (W)
DP-130	24	1.2	0.45(1.7)	470	130(0.90)	5	/	15
DP-125	24	1.0	0.26(1.0)	375	125(0.86)	5	125(0.86)	10
DP-100	24	1.1	0.32(1.2)	375	100(0.68)	5	100(0.68)	10
DP-100A	24	1.1	0.32(1.2)	375	100(0.68)	5	/	10
DP-60	24	3.0	1.3(5.0)	1200	60(0.42)	5	60(0.42)	40
	12	6.0	1.3(5.0)	1200	60(0.42)	5	60(0.42)	40
DP-60A	12	3.5	0.8(3.0)	375	60(0.42)	5	/	20
DP-35	24	4.8	3.2(12)	1300	35(0.24)	5	35(0.24)	40
	12	7	2.5(9.5)	1200	35(0.24)	5	35(0.24)	40


- 注：1、DP-130, DP-125, DP-100等规格可配24V的交流电源。
 2、单位说明：GPM-加仑/分, LPM-升/分, PSI-磅/平方英寸。
 3、单位换算：1美加仑=3.785升 1MPa=145psi
 1.DP-130,DP-125,DP-100could be facilitated by the alternating current at 24V.
 2.Index: GMP-gal./min./,LPM-liter/min,PSI-pound/square inch.
 3.Conversion formulae: 1 gal/3.78Litres 1MPa=145pis


压力-流量曲线 Pressure-turnoff chart

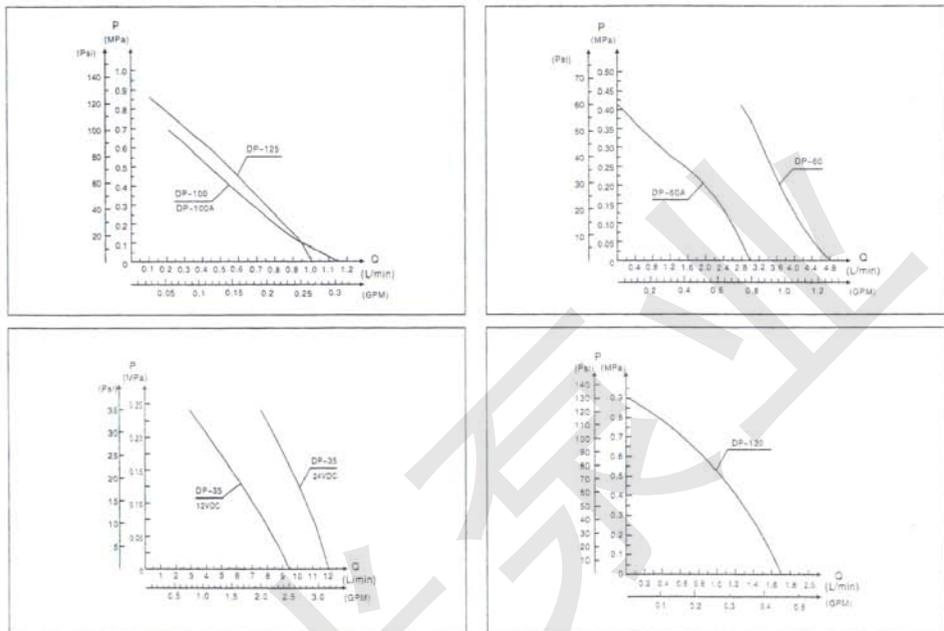


零部件材料和安装尺寸

零件名称 Parts name	材料 Materials
泵壳 Pump shell	尼龙66(30%玻纤增强) Nylon 66 (30% fiberglass enhancement)
活塞 Piston	尼龙66(30%玻纤增强) Nylon 66 (30% fiberglass enhancement)
集流板 Collector board	尼龙66(30%玻纤增强) Nylon 66 (30% fiberglass enhancement)
连接弯管 Bend pipe connection	尼龙66(30%玻纤增强) Nylon 66 (30% fiberglass enhancement)
隔膜片 Diaphragm	三元乙丙塑胶(美国产) Epdm plastic (American made)
膜片 Diaphragm	三元乙丙橡胶 Epdm

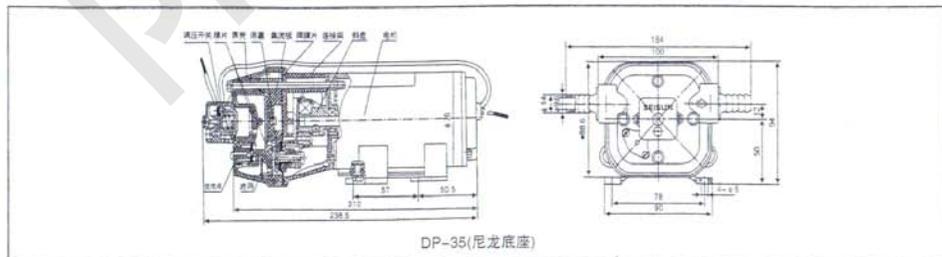


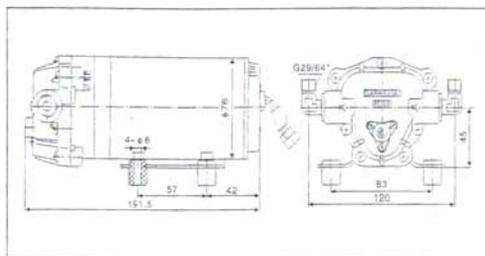


DP-125(铁底座、橡胶脚柱)

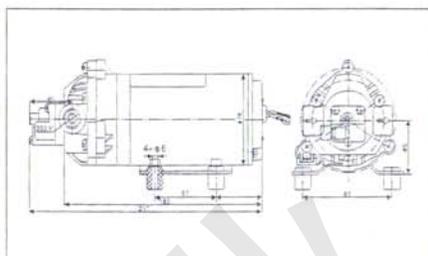


DP-100、DP-60型(铁底座、橡胶脚柱)

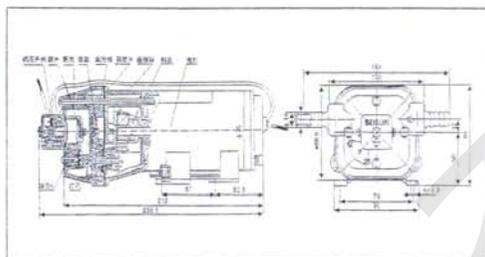


DP-35(尼龙底座)

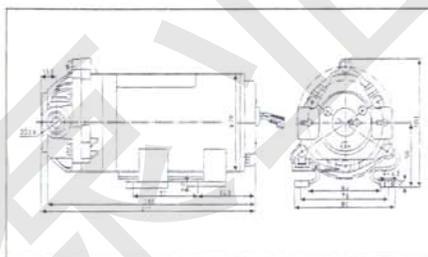


DP-100A、DP-60A(尼龙底座)

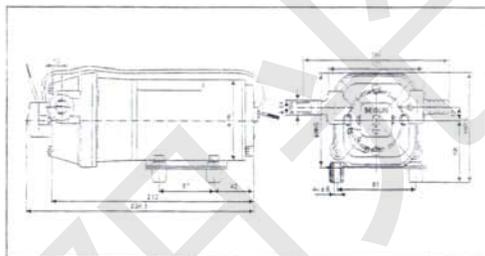


DP-35(铁底座、橡胶脚柱)

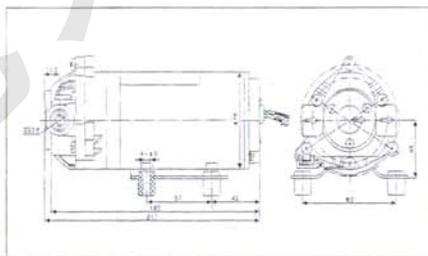

DP-100A、DP-60A型(铁底座、橡胶脚柱)

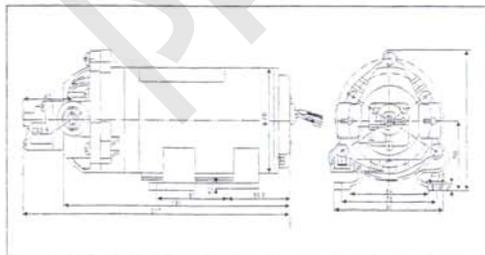

DP-100、DP-60(尼龙底座)

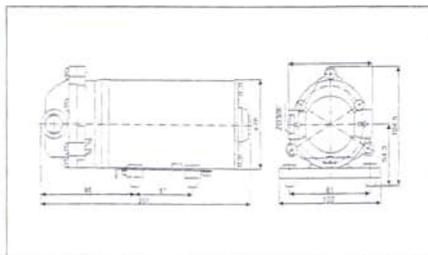

DP-130型(铁底座、橡胶脚柱)

故障及排除方法 Fault and elimination method

故障 Fault	原因 Reason	排除方法 Elimination method
电动机运转正常， 但出口无水流出 Motor is normal, but the export without the water out	进口或出口管道有堵塞 Import or export pipeline have blocked	拆下进出口管道，排除管内堵塞物 Dismantling the import and export pipeline, eliminate tube forming
	进口管道内有空气 There were air inlet piping	拧紧进口接头，使密封完好 Tight joints, make good seal imports
	泵内有杂物阻塞 There were sundry jams. Pump	拆开泵头，清除杂物 Open pump head, remove debris
	隔膜片破裂 Diaphragm rupture of	更换隔膜片 Replace diaphragm of
接通电源，电动机不运转 Switch on the power, motor doesn't work	接线脱接或虚接 Pick or a virtual take off wiring	将引线重新固定连接 Will lead to fixed connection
	泵未接通电源 Pump did not turn on the power	使泵接通电源 Supply power to pump
	电动机故障 Motor fault	修理或更换电机 Repair or replace the motor
	变压器故障 Transformer faults	修理或更换变压器 Repair or replace transformer
流量和扬程均偏小 Flow and head are smaller	泵进口处积有空气 Pump inlet product with air	拧紧进口接头，使密封完好 Tight joints, make good seal imports
	有杂物堵在泵内或管道里 Plugging in materials or inside the pipe pump	排除泵内或管道杂物 Out in the pump or pipe fragments
	隔膜片破裂 Diaphragm rupture of	更换隔膜片 Replace diaphragm of
	电动机故障 Motor fault	修理或更换电机 Repair or replace the motor
	过滤网堵塞 Screen pack jams	清除过滤网内杂物 Remove meat sundry filter



警告：在修理泵之前，须关闭电源。

Warning: in the repair of pump, shall, before it shut off the power.

阳光泵业

上海阳光泵业制造有限公司

地址：上海市共和新路 3088 弄

邮编：200072

电话：021-66528888

传真：021-66525619

网址：<http://www.yg-pump.com>

邮箱：sales@yg-pump.com